

## **FLOWPLANT**

## **DTK500 TRAILER**

- Suitable for drains up to 300mm (12")
- Ideal for unblocking, descaling & root cutting
- 500 litre (110 gallon) plastic water tanks
- Radio and Manual control options
- Fast tow UK & EU compliant trailer
- Build options: Radio remote control, Antifreeze kit, Jump jet kit, Inlet hose reel

Scan the QR code to view the product online.













MODEL	DTK 500 TRAILER
MAX PRESSURE & FLOW	Up to 275 bar / Up to 55 litres per minute (4000 psi / 12 gpm) Up to 350 bar / Up to 41 litres per minute (5000 psi / 9 gpm) Up to 415 bar / Up to 32 litres per minute (6000 psi / 7 gpm)
РИМР	Harben® 'P' type radial piston diaphragm
ENGINE	Stage 5 emission compliant water cooled diesel
WATER TANK	Twin interconnected water storage tanks with a total capacity of 500 litres (110 gallons)
FRAME	Box section steel shot blasted and powder coated
HOSE REEL	Variable-speed hydraulic-rewind hose reel with 120m high-pressure hose capacity
DIMENSIONS	3245mm long x 1710mm wide x 1375mm high *
WEIGHT	Dry weight from 1000kg dry or 1500kg full * (Plated weight is 1600 kgs)

Flowplant Group Ltd provides the information herein in good faith but makes no representation as to its comprehensiveness or accuracy. This data sheet is intended only as a guide to Flowplant Group Ltd products and services. Individuals using this data sheet must exercise their independent judgment in evaluating product selection and determining product appropriateness for their particular purpose and system requirements. Flowplant Group Ltd MAKES NO REPRESENTATIONS OR WARRANTIES, EITHER EXPRESS OR IMPLIED, INCLUDING WITHOUT LIMITATION ANY WARRANTIES OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE WITH RESPECT TO THE INFORMATION SET FORTH HEREIN OR THE PRODUCT(S) TO WHICH THE INFORMATION REFERS. ACCORDINGLY, Flowplant Group Ltd WILL NOT BE RESPONSIBLE FOR DAMAGES (OF ANY KIND OR NATURE, INCLUDING INCIDENTAL, INDIRECT, OR CONSEQUENTIAL DAMAGES) RESULTING FROM THE USE OF OR RELIANCE UPON THIS INFORMATION. Flowplant Group Ltd reserves the right to change product designs and specifications without notice.



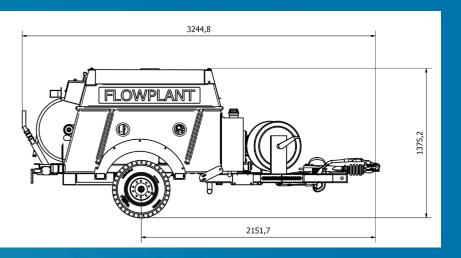

## **OPTIONAL ACCESSORIES**

Scan the QR code to view and purchase online.



The below is only a small selection of accessories available for use with this unit. Please contact us for more information.

Personal Protective Equipment (PPE) for operators is required at all times when working with water jetting equipment and can be supplied by Flowplant.

DESCRIPTION	PART NO.
90m (300ft) x 1/2" high pressure hose	055021
Tiger Tail 2" Bore (to help prevent hose damage)	0551443
1/2" Standard Drain Jet (3 rear)	056097
1/2" Standard Drain Jet (3 rear 1 forward)	056413
1/2" Standard Drain Jet (6 rear)	056584
1/2" Reaper nozzle - powerful unblocking nozzle, with rotary forward jet	0561236
1/2" Drain jet extension (9" long)	033085
3m (10ft) x 1/2" safety leader hose	055093
Water jetting gun (dump type)	031040
Gun/hose safety shroud 750mm	057381
Fan jet (for jetting gun)	TBA
Round jet (for jetting gun)	TBA
Rotary jetting gun nozzle	056326

Flowplant Group Ltd, Gemini House, Brunel Road, Churchfields Ind. Est., Salisbury, Wiltshire, SP2 7PU



+44 1722 325424









www.flowplant.com